


Ciflex 900

Vibration dampening & absorption

Properties	Test Method	Specifications	
		Unit	Type 900
Color (core material)			Green
Standard dimensions	Length x width	mm	1000 x 500
(Other dim./thickness by request)	Thickness	mm	12,5
Surface (other by request)			skin / skin
Max. static load	Internal	N/mm ²	0,9
Max. total load	Internal	N/mm ²	1,800
Compression set	DIN EN ISO 1856 (50%, 23°, 70h, 30 min. after	%	< 10
Tensile strength	DIN EN ISO 1798	N/mm ²	6,3
E-modulus	DIN EN ISO 1798	N/mm ²	2,77
Elongation at break	DIN EN ISO 1798	%	> 300
Hardness	Internal	Asker C	75 - 80
Angle tear	DIN 53515	N/mm	> 15
Compression hardness	DIN ISO 3386	25%	1,48
		40%	3,14
		50%	6,33
		65%	17,08
Pendulum rebound	Internal	%	> 65
Electrical conductivity		Mohm.cm	> 1000
Thermal conductivity		W/(m.K)	0,07 - 0,11
Water absorption	Volume swell 7 days	%	< 10
Fire properties	DIN 4102	Class	B2
	EN ISO 13501-1		E
Temperature	Operating temp.	C°	-30 +60


RANGE OF USE - CIFLEX

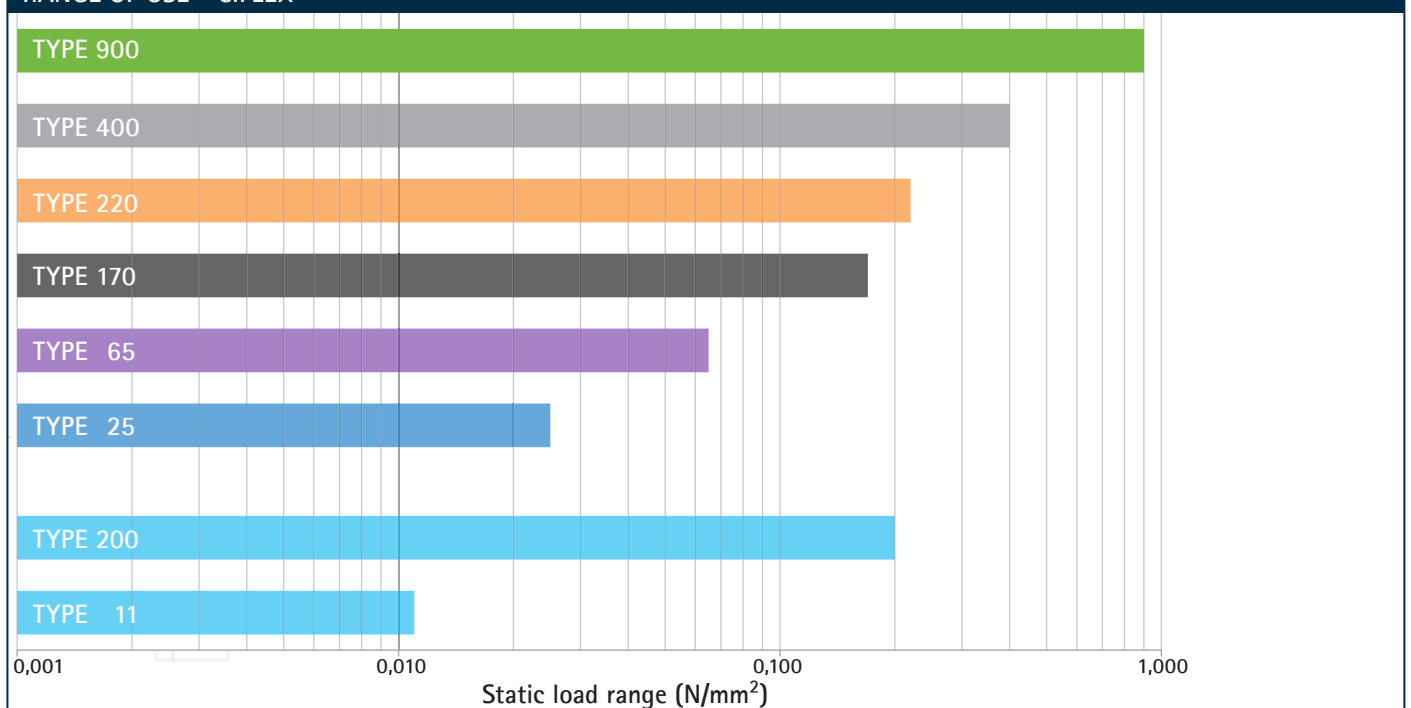


Ciflex 900

Vibration dampening & absorption

Load Deflection Curve

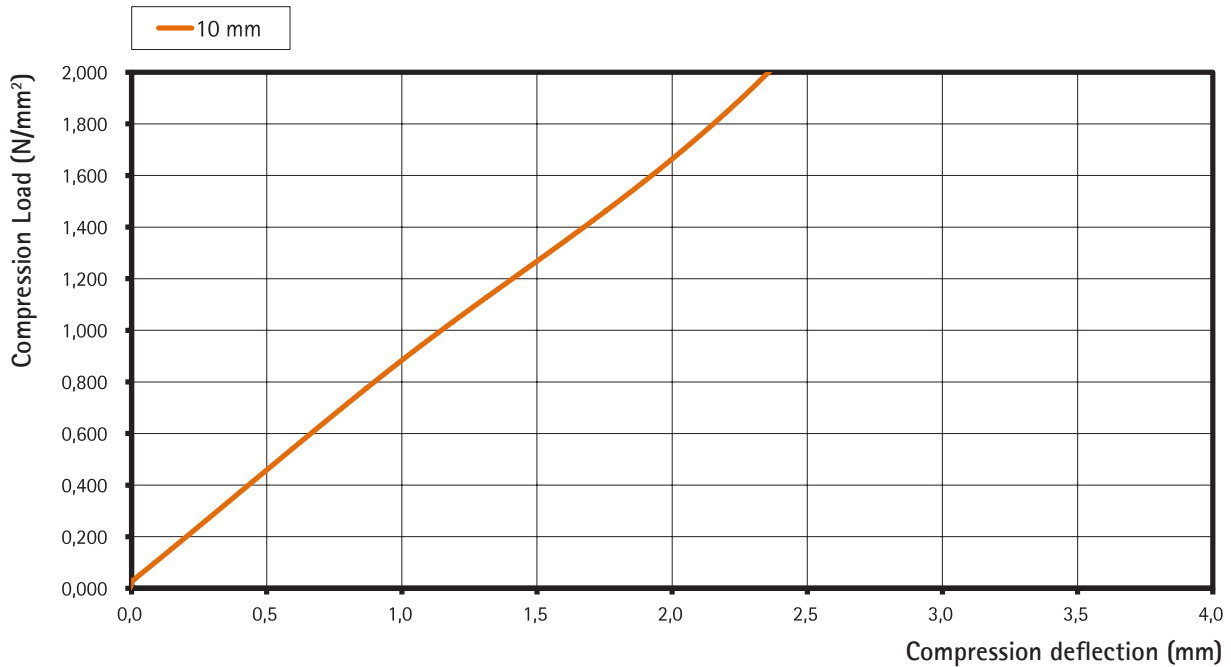


Natural Frequency

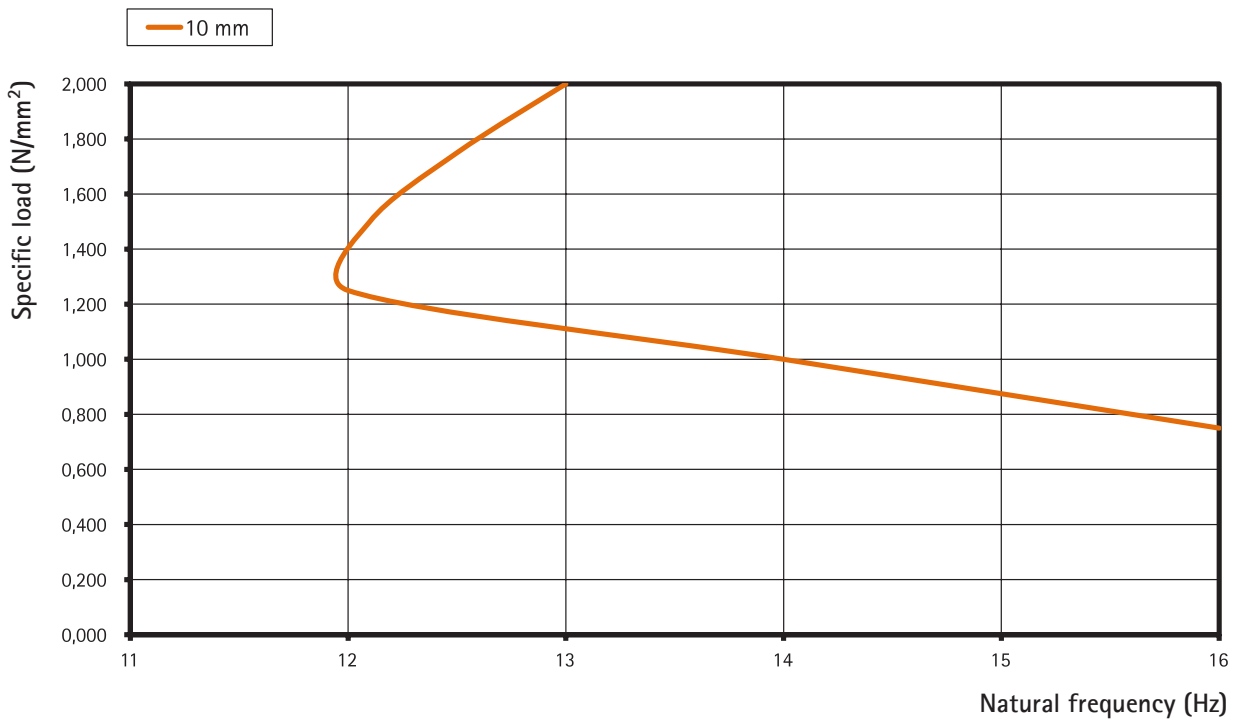


Ciflex 900

Vibration dampening & absorption

Frequency Isolation

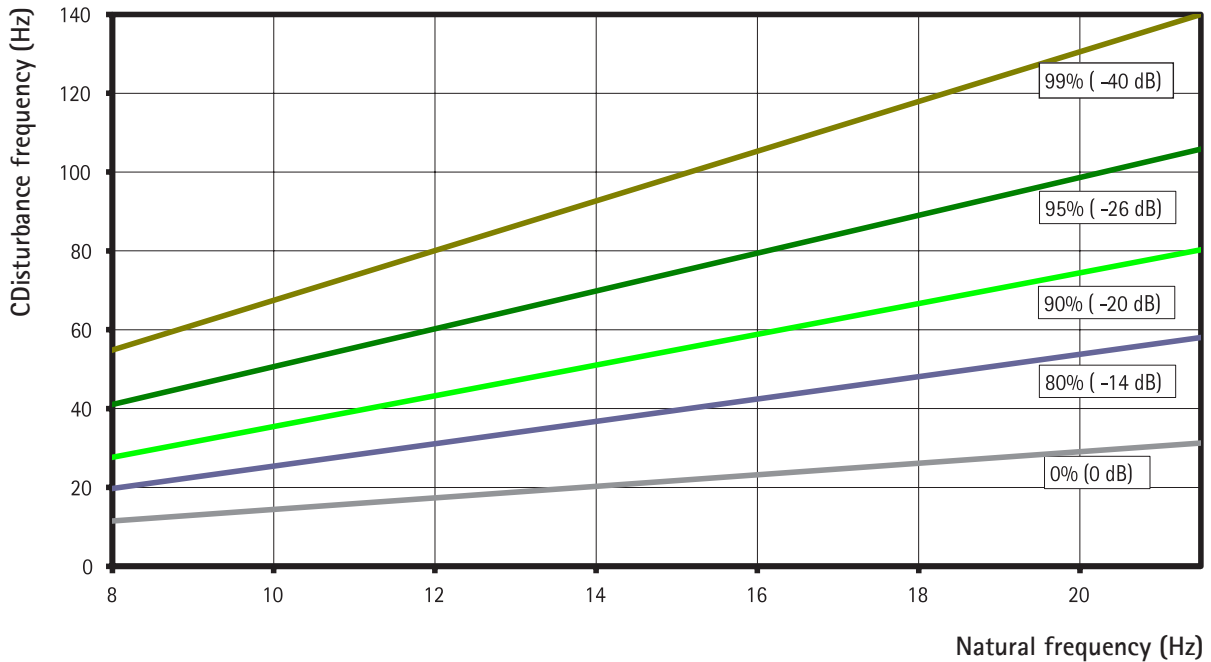

DMTA

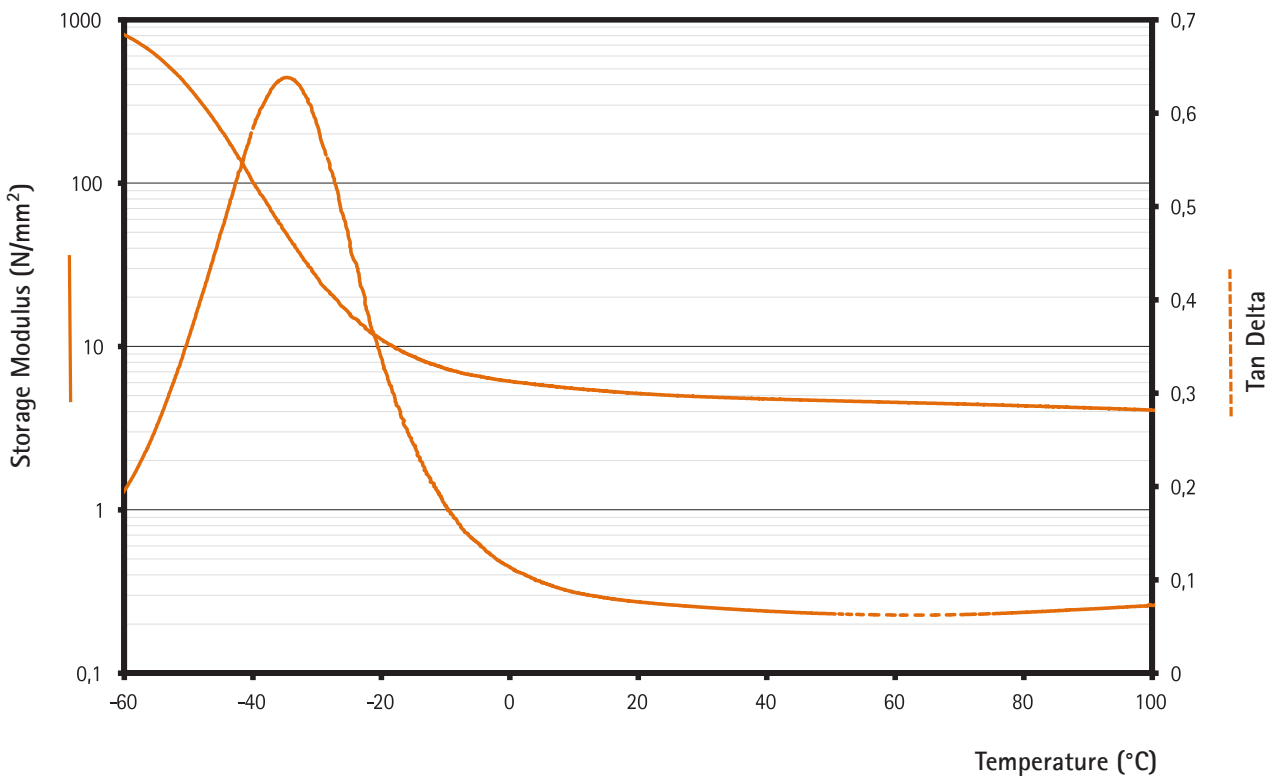

Subject to alterations.

The information submitted in this data sheet is based on our current knowledge and experience. It does not imply any legally binding assurance. Calenberg Ingenieure reserves the right to update product data information without prior notice. Whenever used, the special conditions of the particular application must be taken into consideration, particularly those regarding physical, technical and legal aspects concerning construction.

© Copyright - Calenberg Ingenieure GmbH - 2019